

R&S[®] ESR EMI Test Receiver Specifications



CONTENTS

Definitions	3
Specifications.....	4
Frequency	4
Preselection and preamplifier	6
IF and resolution bandwidths	7
Level.....	7
Measurement speed	16
Trigger functions.....	16
Audio demodulation	17
Inputs and outputs	17
General data.....	19
Options	20
R&S®FSV-B9 tracking generator (spectrum analyzer mode).....	20
R&S®ESR-B10 external generator control	21
R&S®FSV-B30 DC power supply for 12 V/24 V supply voltage	21
R&S®FSV-B32 Lithium-ion battery pack.....	21
R&S®FSV-B34 charger for R&S®FSV-B32 Lithium-ion battery pack.....	21
R&S®ESR-K55 real-time spectrum analyzer mode	22
<i>Level</i>	23
<i>Result display</i>	23
<i>Trigger</i>	24
R&S®ESR-K56 IF analysis.....	25
Ordering information	26
Options.....	26
Upgrades.....	26
Recommended extras.....	27

Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

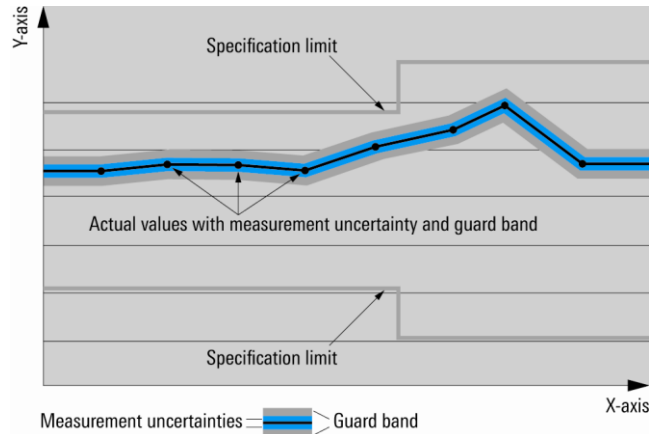

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Specifications

Operating modes		EMI test receiver
		spectrum analyzer
	with R&S®ESR-K55 option	real-time spectrum analyzer

Frequency

Frequency range	R&S®ESR3	
	input 1, AC coupled	10 MHz to 3.6 GHz
	input 1, DC coupled	9 kHz to 3.6 GHz
	input 2, DC coupled	9 kHz to 1 GHz
	R&S®ESR7	
	input 1, AC coupled	10 MHz to 7 GHz
	input 1, DC coupled	9 kHz to 7 GHz
	input 2, DC coupled	9 kHz to 1 GHz
	R&S®ESR26	
	input 1, AC coupled	10 MHz to 26.5 GHz
	input 1, DC coupled	9 kHz to 26.5 GHz
	input 2, DC coupled	9 kHz to 1 GHz
Frequency resolution	with R&S®ESR-B29 option, DC coupled	10 Hz to max. frequency
	receiver mode	0.1 Hz
	analyzer mode	0.01 Hz

Reference frequency, internal		
Accuracy		$\pm((\text{time since last adjustment} \times \text{aging rate}) + \text{temperature drift} + \text{calibration accuracy})$
Aging per year	standard	$\pm 1 \times 10^{-6}$
	with R&S®FSV-B4 option	$\pm 1 \times 10^{-7}$
Temperature drift (+5 °C to +45 °C)	standard	$\pm 1 \times 10^{-6}$
	with R&S®FSV-B4 option, model .02	$\pm 1 \times 10^{-7}$
	with R&S®FSV-B4 option, model .03	$\pm 1 \times 10^{-8}$
Max. initial calibration accuracy	standard	$\pm 5 \times 10^{-7}$
	with R&S®FSV-B4 option	$\pm 5 \times 10^{-8}$

Frequency readout (analyzer mode)		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10\% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value	691
	range	
	spectrum analyzer	101 to 32 001
	EML measurement	101 to 200 001
Marker tuning frequency step size	marker step size = sweep points	$\text{span}/(\text{sweep points} - 1)$
	marker step size = standard	$\text{span}/(\text{default sweep points} - 1)$
Frequency counter resolution		0.001 Hz
Count accuracy		$\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2}(\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		$\pm 0.1\%$

Receiver scan		
Scan		max. 10 subranges with different settings
Scan modes		normal, time domain ¹
Measurement time	normal scan, per frequency	50 μ s to 100 s
	time domain scan, per subrange ¹	50 μ s to 100 s
Number of trace points		up to 4 000 000
Frequency step size	normal scan	min. 1 Hz
	time domain scan ¹	0.25 \times resolution bandwidth
Time domain scan¹		
Frequency segment processed in parallel	f < 7 GHz	
	RBW = 200 Hz	0.66 MHz
	RBW = 9 kHz	30 MHz
	RBW = 120 kHz	24.6 MHz
	RBW = 1 MHz	25.6 MHz
	f \geq 7 GHz	
	RBW = 200 Hz	0.66 MHz
RBW \geq 9 kHz	10 MHz	
FFT overlap factor		$\geq 93\%$


Spectrum analyzer		
Sweep time range	span = 0 Hz	1 μ s to 16 000 s
	span \geq 10 Hz, swept	1 ms to 16 000 s ²
	span \geq 10 Hz, FFT	7 μ s to 16 000 s ³
Sweep time accuracy	span = 0 Hz	$\pm 0.1\%$ (nom.)
	span \geq 10 Hz, swept	$\pm 3\%$ (nom.)

Spectral purity		
SSB phase noise	frequency = 500 MHz, carrier offset	
	100 Hz	< -84 dBc (1 Hz)
	1 kHz	< -101 dBc (1 Hz)
	10 kHz	< -106 dBc (1 Hz)
	100 kHz	< -115 dBc (1 Hz)
	1 MHz	< -134 dBc (1 Hz)
	10 MHz	< -150 dBc (1 Hz) (nom.)
Residual FM	frequency = 500 MHz, RBW = 1 kHz, sweep time = 100 ms	< 3 Hz (nom.)

¹ Requires R&S®ESR-K53 option.

² Net sweep time without additional hardware settling time.

³ Data acquisition time for FFT calculation.

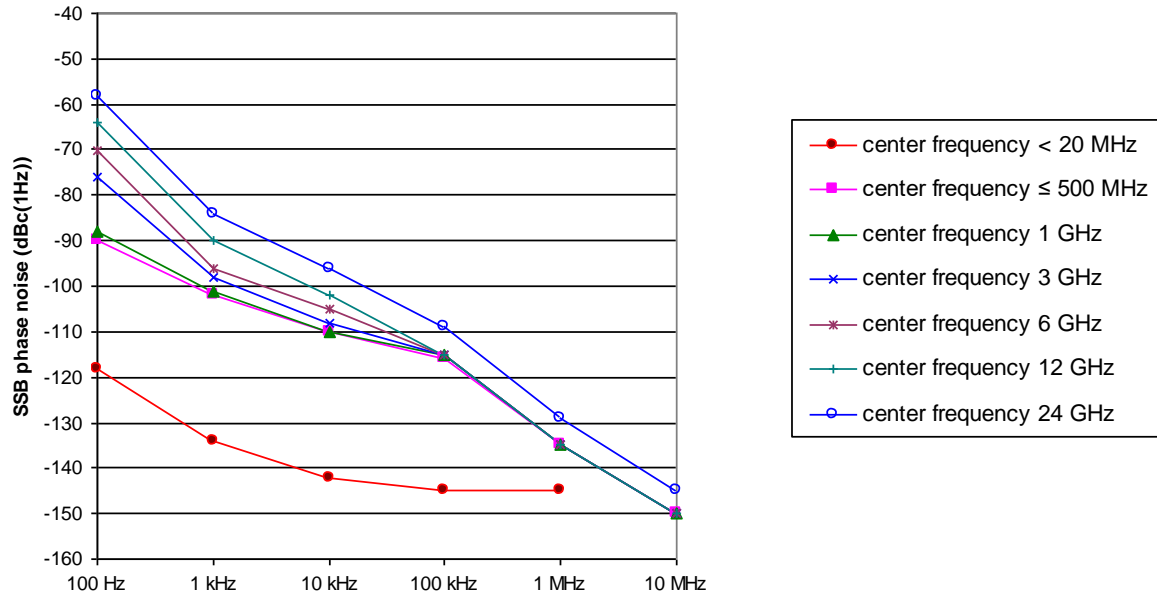

Typical phase noise at different center frequencies.

Preselection and preamplifier

Preselection		
State	receiver mode	always on
	analyzer mode	on/off (selectable)
Number of preselection filters		16
Bandwidths (−6 dB), nominal	10 Hz to 150 kHz	fixed lowpass filter
	150 kHz to 30 MHz	35 MHz, fixed bandpass filter
	30 MHz to 80 MHz	94 MHz, fixed bandpass filter
	80 MHz to 130 MHz	94 MHz, fixed bandpass filter
	130 MHz to 180 MHz	91 MHz, fixed bandpass filter
	180 MHz to 230 MHz	105 MHz, fixed bandpass filter
	230 MHz to 300 MHz	110 MHz, fixed bandpass filter
	300 MHz to 425 MHz	195 MHz, fixed bandpass filter
	425 MHz to 570 MHz	200 MHz, fixed bandpass filter
	570 MHz to 715 MHz	210 MHz, fixed bandpass filter
	715 MHz to 860 MHz	200 MHz, fixed bandpass filter
	860 MHz to 1005 MHz	200 MHz, fixed bandpass filter
	1005 MHz to 1750 MHz	fixed highpass filter
	1750 MHz to 2850 MHz	fixed highpass filter
2850 MHz to 4850 MHz	fixed highpass filter	
4850 MHz to 7000 MHz	fixed highpass filter	
	7 GHz to 26.5 GHz	YIG filter
Preamplifier	switchable	
Location	1 kHz to 7 GHz	in the signal path between preselection and 1st mixer
	7 GHz to 26.5 GHz	in the signal path between diplexer and preselection
Range		1 kHz to 26.5 GHz
Gain	1 kHz to 7 GHz	20 dB (nom.)
	7 GHz to 26.5 GHz	30 dB (nom.)

IF and resolution bandwidths

IF and sweep filters		
Resolution bandwidths (-3 dB)	receiver mode or analyzer mode, span \geq 10 Hz	10 Hz to 10 MHz in 1/2/3/5 sequence
	analyzer mode, span = 0 Hz	20 MHz, 28 MHz additionally
	analyzer mode, span = 0 Hz, $f \leq$ 7 GHz	40 MHz additionally
Bandwidth uncertainty		< 3 %
Shape factor 60 dB:3 dB		< 5
EMI bandwidths (-6 dB)	standard	200 Hz, 9 kHz, 120 kHz, 1 MHz
	with R&S®ESR-B29 option	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz additionally
Bandwidth uncertainty		< 3 %
Shape factor 60 dB:6 dB		< 4

FFT filters (analyzer mode)		
Resolution bandwidths (-3 dB)	span \geq 10 Hz	10 Hz to 300 kHz in 1/2/3/5 sequence
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 5 (nom.)

Channel filters (analyzer mode)		
Bandwidths (-3 dB)	standard (RRC = root raised cosine)	100/200/300/500 Hz
		1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/24.3 (RRC) /25/30/50/100/150/192/200/300/500 kHz
	$f \leq$ 7 GHz	1/1.228/1.28 (RRC)/1.5/2/3/3.84 (RRC)/ 4.096 (RRC)/5/5.6/8/10 MHz 20/28/40 MHz additionally
Bandwidth accuracy		< 2 % (nom.)
Shape factor 60 dB:3 dB		< 2 (nom.)

Video bandwidths (analyzer mode)		
		1 Hz to 10 MHz in 1/2/3/5 sequence, 20 MHz, 28 MHz
	$f \leq$ 7 GHz	40 MHz additionally

Level

Display range		displayed noise floor up to +30 dBm
---------------	--	-------------------------------------

Max. input level		
DC voltage	input 1	
	AC coupled	50 V
	DC coupled	0 V
	input 2	0 V
CW RF power	RF attenuation = 0 dB	
	RF preamplifier = off	20 dBm (= 0.1 W)
	RF preamplifier = on	13 dBm (= 0.02 W)
	RF attenuation \geq 10 dB	
	RF preamplifier = off	30 dBm (= 1 W)
	RF preamplifier = on	23 dBm (= 0.2 W)
Pulse spectral density	RF attenuation = 0 dB, preselection = on ⁴ , RF preamplifier = off	97 dB μ V/MHz
Max. pulse voltage	RF attenuation \geq 10 dB	
	input 1	150 V
	input 2	450 V
Max. pulse energy	RF attenuation \geq 10 dB, 10 μ s	
	input 1	1 mWs
	input 2	20 mWs

⁴ Default setting in receiver mode.

Intermodulation				
1 dB compression of input mixer	RF attenuation = 0 dB, preselection and preamplifier = off ⁵			
	<table border="1"> <tr> <td>f ≤ 7 GHz</td> <td>+10 dBm (nom.)</td> </tr> <tr> <td>f > 7 GHz</td> <td>+5 dBm (nom.)</td> </tr> </table>	f ≤ 7 GHz	+10 dBm (nom.)	f > 7 GHz
f ≤ 7 GHz	+10 dBm (nom.)			
f > 7 GHz	+5 dBm (nom.)			
Third-order intercept point (TOI)	RF attenuation = 0 dB, level = 2 × -15 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger, preselection = off ⁵ , with R&S®FSV-B22 option: RF preamplifier = off			
	10 MHz ≤ f _{in} < 100 MHz	> 12 dBm, 15 dBm (typ.)		
	100 MHz ≤ f _{in} < 3.6 GHz	> 13 dBm, 16 dBm (typ.)		
	3.6 GHz ≤ f _{in} ≤ 26.5 GHz	> 15 dBm, 18 dBm (typ.)		
	preselection = on ⁶ , preamplifier = off, RF attenuation = 0 dB, level = 2 × -20 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger			
	10 MHz ≤ f _{in} < 100 MHz	> 5 dBm, 8 dBm (typ.)		
	100 MHz ≤ f _{in} < 4.5 GHz	> 8 dBm, 11 dBm (typ.)		
	4.5 GHz ≤ f _{in} ≤ 7 GHz	> 5 dBm, 8 dBm (typ.)		
	7 GHz ≤ f _{in} ≤ 26.5 GHz	> 15 dBm, 18 dBm (typ.)		
	preselection = on ⁶ , preamplifier = on, RF attenuation = 0 dB, level = 2 × -45 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger			
	10 MHz ≤ f _{in} < 100 MHz	> -16 dBm, -13 dBm (typ.)		
	100 MHz ≤ f _{in} < 3.6 GHz	> -14 dBm, -11 dBm (typ.)		
	3.6 GHz ≤ f _{in} ≤ 7 GHz	> -10 dBm, -7 dBm (typ.)		
	7 GHz ≤ f _{in} ≤ 26.5 GHz	-10 dBm (nom.)		
	with R&S®FSV-B22 option, preselection = off ⁵ , RF preamplifier = on, RF attenuation = 0 dB, level = 2 × -45 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger			
	10 MHz ≤ f _{in} < 100 MHz	-3 dBm (nom.)		
100 MHz ≤ f _{in} < 3.6 GHz	-2 dBm (nom.)			
3.6 GHz ≤ f _{in} ≤ 7 GHz	0 dBm (nom.)			
7 GHz ≤ f _{in} ≤ 26.5 GHz	-10 dBm (nom.)			
Second-harmonic intercept (SHI)	RF attenuation = 0 dB, level = -10 dBm, preselection = off ⁵ , with R&S®FSV-B22 option: RF preamplifier = off			
	100 MHz < f _{in} ≤ 3.5 GHz	45 dBm (nom.)		
	3.5 GHz < f _{in} ≤ 13.25 GHz	75 dBm (nom.)		
	RF attenuation = 0 dB, level = -15 dBm, preselection = on ⁶ , preamplifier = off			
	100 MHz < f _{in} ≤ 3.5 GHz	50 dBm (nom.)		
	3.5 GHz < f _{in} ≤ 13.25 GHz	75 dBm (nom.)		
	RF attenuation = 0 dB, level = -10 dBm, preselection = on ⁶ , preamplifier = on			
	100 MHz < f _{in} ≤ 3.5 GHz	35 dBm (nom.)		
	3.5 GHz < f _{in} ≤ 13.25 GHz	10 dBm (nom.)		
	with R&S®FSV-B22 option, preselection = off ⁵ , RF preamplifier = on, RF attenuation = 0 dB, level = -40 dBm			
100 MHz < f _{in} ≤ 3.5 GHz	25 dBm (nom.)			
3.5 GHz < f _{in} ≤ 13.25 GHz	10 dBm (nom.)			

⁵ Preselection = off is only available in analyzer mode. In receiver mode the preselection is permanently on.

⁶ Default setting in receiver mode.

Displayed average noise level (analyzer mode)

RF attenuation = 0 dB, preselection = off/on, preamplifier = off, termination = 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, sample detector, trace average, sweep count = 20, mean marker

R&S®ESR3, R&S®ESR7

9 kHz \leq f < 100 kHz	< -130 dBm, -140 dBm (typ.)
100 kHz \leq f < 1 MHz	< -145 dBm, -150 dBm (typ.)
1 MHz \leq f < 1 GHz	< -152 dBm, -155 dBm (typ.)
1 GHz \leq f < 3.6 GHz	< -150 dBm, -151 dBm (typ.)
3.6 GHz \leq f < 6 GHz	< -148 dBm, -151 dBm (typ.)
6 GHz \leq f \leq 7 GHz	< -146 dBm, -149 dBm (typ.)

R&S®ESR26

9 kHz \leq f < 100 kHz	< -130 dBm, -140 dBm (typ.)
100 kHz \leq f < 1 MHz	< -145 dBm, -150 dBm (typ.)
1 MHz \leq f < 1 GHz	< -150 dBm, -153 dBm (typ.)
1 GHz \leq f < 3.6 GHz	< -147 dBm, -150 dBm (typ.)
3.6 GHz \leq f < 6 GHz	< -144 dBm, -147 dBm (typ.)
6 GHz \leq f < 7.4 GHz	< -141 dBm, -144 dBm (typ.)
7.4 GHz \leq f < 13.6 GHz	< -145 dBm, -148 dBm (typ.)
13.6 GHz \leq f < 15 GHz	< -143 dBm, -146 dBm (typ.)
15 GHz \leq f \leq 26.5 GHz	< -141 dBm, -144 dBm (typ.)

with R&S®ESR-B29 option, RF attenuation = 0 dB, preselection = off/on, preamplifier = off, termination = 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 10 Hz, VBW = 10 Hz, zero span, sweep time = 500 ms, sample detector, trace average, sweep count = 20, mean marker

R&S®ESR3, R&S®ESR7, R&S®ESR26

10 Hz	< -90 dBm, -100 dBm (typ.)
20 Hz	< -100 dBm, -110 dBm (typ.)
100 Hz	< -110 dBm, -120 dBm (typ.)
1 kHz	< -120 dBm, -130 dBm (typ.)

RF attenuation = 0 dB, preselection = on, preamplifier = on, termination = 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, sample detector, trace average, sweep count = 20, mean marker

R&S®ESR3, R&S®ESR7

9 kHz \leq f < 100 kHz	< -150 dBm, -155 dBm (typ.)
100 kHz \leq f < 1 MHz	< -155 dBm, -160 dBm (typ.)
1 MHz \leq f < 1 GHz	< -165 dBm, -168 dBm (typ.)
1 GHz \leq f < 3.6 GHz	< -162 dBm, -165 dBm (typ.)
3.6 GHz \leq f < 6 GHz	< -160 dBm, -163 dBm (typ.)
6 GHz \leq f \leq 7 GHz	< -158 dBm, -161 dBm (typ.)

R&S®ESR26

9 kHz \leq f < 150 kHz	< -150 dBm, -155 dBm (typ.)
150 kHz \leq f < 2 MHz	< -155 dBm, -160 dBm (typ.)
2 MHz \leq f < 1 GHz	< -161 dBm, -164 dBm (typ.)
1 GHz \leq f < 3.6 GHz	< -158 dBm, -161 dBm (typ.)
3.6 GHz \leq f < 6 GHz	< -156 dBm, -159 dBm (typ.)
6 GHz \leq f < 7.4 GHz	< -154 dBm, -157 dBm (typ.)
7.4 GHz \leq f < 13.6 GHz	< -164 dBm, -167 dBm (typ.)
13.6 GHz \leq f \leq 26.5 GHz	< -157 dBm, -160 dBm (typ.)

with R&S®ESR-B29 option,

RF attenuation = 0 dB, preselection = on, preamplifier = on, termination = 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 10 Hz, VBW = 5 Hz, zero span, sweep time = 500 ms, sample detector, trace average, sweep count = 20, mean marker

R&S®ESR3, R&S®ESR7

1 kHz	< -140 dBm, -150 dBm (typ.)
-------	-----------------------------

R&S®ESR26

1 kHz	< -130 dBm, -140 dBm (typ.)
-------	-----------------------------

with R&S®FSV-B22 option, RF attenuation = 0 dB, preselection = off, RF preamplifier = on, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, sample detector, trace average, sweep count = 20, mean marker	
R&S®ESR3, R&S®ESR7	
100 kHz ≤ f < 1 MHz	< -150 dBm, -155 dBm (typ.)
1 MHz ≤ f < 1 GHz	< -162 dBm, -165 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -160 dBm, -163 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -158 dBm, -161 dBm (typ.)
6 GHz ≤ f ≤ 7 GHz	< -156 dBm, -159 dBm (typ.)
R&S®ESR26	
100 kHz ≤ f < 1 MHz	< -145 dBm, -148 dBm (typ.)
1 MHz ≤ f < 20 MHz	< -155 dBm, -158 dBm (typ.)
20 MHz ≤ f < 1 GHz	< -160 dBm, -163 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -157 dBm, -160 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -153 dBm, -156 dBm (typ.)
6 GHz ≤ f < 7.4 GHz	< -150 dBm, -153 dBm (typ.)
7.4 GHz ≤ f < 13.6 GHz	< -164 dBm, -167 dBm (typ.)
13.6 GHz ≤ f ≤ 26.5 GHz	< -157 dBm, -160 dBm (typ.)

Noise indication (receiver mode), nominal, calculated from DANL data	
RF attenuation = 0 dB, preamplifier = off, termination = 50 Ω , average detector (AV)	
R&S®ESR3, R&S®ESR7	
9 kHz \leq f < 100 kHz, BW = 200 Hz	< 0 dB μ V
100 kHz \leq f < 150 kHz, BW = 200 Hz	< -15 dB μ V
150 kHz \leq f < 1 MHz, BW = 9 kHz	< 2 dB μ V
1 MHz \leq f < 30 MHz, BW = 9 kHz	< -5 dB μ V
30 MHz \leq f < 1 GHz, BW = 120 kHz	< 6 dB μ V
1 GHz \leq f < 3.6 GHz, BW = 1 MHz	< 17 dB μ V
3.6 GHz \leq f < 6 GHz, BW = 1 MHz	< 19 dB μ V
6 GHz \leq f \leq 7 GHz, BW = 1 MHz	< 21 dB μ V
R&S®ESR26	
9 kHz \leq f < 100 kHz, BW = 200 Hz	< 0 dB μ V
100 kHz \leq f < 150 kHz, BW = 200 Hz	< -15 dB μ V
150 kHz \leq f < 1 MHz, BW = 9 kHz	< 2 dB μ V
1 MHz \leq f < 30 MHz, BW = 9 kHz	< -3 dB μ V
30 MHz \leq f < 1 GHz, BW = 120 kHz	< 8 dB μ V
1 GHz \leq f < 3.6 GHz, BW = 1 MHz	< 20 dB μ V
3.6 GHz \leq f < 6 GHz, BW = 1 MHz	< 23 dB μ V
6 GHz \leq f < 7.4 GHz, BW = 1 MHz	< 26 dB μ V
7.4 GHz \leq f < 13.6 GHz, BW = 1 MHz	< 22 dB μ V
13.6 GHz \leq f < 15 GHz, BW = 1 MHz	< 24 dB μ V
15 GHz \leq f \leq 26.5 GHz, BW = 1 MHz	< 26 dB μ V
with R&S®ESR-B29 option, RF attenuation = 0 dB, preamplifier = off, termination = 50 Ω , average detector (AV)	
R&S®ESR3, R&S®ESR7, R&S®ESR26	
10 Hz, BW = 10 Hz	< 27 dB μ V
20 Hz, BW = 10 Hz	< 17 dB μ V
100 Hz, BW = 10 Hz	< 7 dB μ V
1 kHz, BW = 100 Hz	< 7 dB μ V
RF attenuation = 0 dB, preamplifier = on, termination = 50 Ω , average detector (AV)	
R&S®ESR3, R&S®ESR7	
9 kHz \leq f < 100 kHz, BW = 200 Hz	< -20 dB μ V
100 kHz \leq f < 150 kHz, BW = 200 Hz	< -25 dB μ V
150 kHz \leq f < 1 MHz, BW = 9 kHz	< -8 dB μ V
1 MHz \leq f < 30 MHz, BW = 9 kHz	< -18 dB μ V
30 MHz \leq f < 1 GHz, BW = 120 kHz	< -7 dB μ V
1 GHz \leq f < 3.6 GHz, BW = 1 MHz	< 5 dB μ V
3.6 GHz \leq f < 6 GHz, BW = 1 MHz	< 7 dB μ V
6 GHz \leq f \leq 7 GHz, BW = 1 MHz	< 9 dB μ V
R&S®ESR26	
9 kHz \leq f < 150 kHz, BW = 200 Hz	< -20 dB μ V
150 kHz \leq f < 2 MHz, BW = 9 kHz	< -8 dB μ V
2 MHz \leq f < 30 MHz, BW = 9 kHz	< -14 dB μ V
30 MHz \leq f < 1 GHz, BW = 120 kHz	< -3 dB μ V
1 GHz \leq f < 3.6 GHz, BW = 1 MHz	< 9 dB μ V
3.6 GHz \leq f < 6 GHz, BW = 1 MHz	< 11 dB μ V
6 GHz \leq f < 7.4 GHz, BW = 1 MHz	< 13 dB μ V
7.4 GHz \leq f < 13.6 GHz, BW = 1 MHz	< 3 dB μ V
13.6 GHz \leq f \leq 26.5 GHz, BW = 1 MHz	< 10 dB μ V
with R&S®ESR-B29 option, RF attenuation = 0 dB, preamplifier = on, termination = 50 Ω , average detector (AV)	
R&S®ESR3, R&S®ESR7	
1 kHz, BW = 100 Hz	< -13 dB μ V
R&S®ESR26	
1 kHz, BW = 100 Hz	< -3 dB μ V

Spurious responses		
Image response	30 MHz ≤ f ≤ 7 GHz	
	$f_{in} - 2 \times 8409.9$ MHz (1st IF)	< -80 dBc (nom.)
	$f_{in} - 2 \times 729.9$ MHz (2nd IF)	< -80 dBc
	$f_{in} - 2 \times 89.9$ MHz (3rd IF)	< -80 dBc
	7 GHz < f ≤ 26.5 GHz	
	$f_{in} \pm 2 \times 729.9$ MHz (1st IF)	< -80 dBc
Intermediate frequency response	30 MHz ≤ f ≤ 7 GHz	
	1st IF (8409.9 MHz)	< -70 dBc (nom.)
	2nd IF (729.9 MHz)	< -80 dBc
	3rd IF (89.9 MHz)	< -80 dBc
	7 GHz < f ≤ 26.5 GHz	
	1st IF (729.9 MHz)	< -80 dBc
Residual spurious response	RF attenuation = 0 dB	
	f ≤ 1 MHz	< -90 dBm
	f > 1 MHz	< -103 dBm
Local oscillator related spurious	30 MHz ≤ f ≤ 15 GHz	
	1 kHz ≤ offset from carrier ≤ 10 MHz	< -70 dBc
	offset from carrier > 10 MHz	< -80 dBc
	15 GHz ≤ f < 26.5 GHz	
	1 kHz ≤ offset from carrier ≤ 10 MHz	< -64 dBc
	offset from carrier > 10 MHz	< -74 dBc
Other interfering signals		
Subharmonic of 1st LO	20 MHz ≤ f < 7 GHz, spurious at 8410 MHz - 2 × f _{in}	< -70 dBc
Harmonic of 1st LO	mixer level < -25 dBm, spurious at f _{in} - 4205 MHz	< -70 dBc

Level display (analyzer mode)		
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max. peak, min. peak, auto peak (normal), sample, RMS, average, quasi-peak, CISPR-average, RMS-average
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB
Units of level axis	logarithmic level display	dBm, dB μ V, dBmV, dB μ A, dBpW
	linear level display	μ V, mV, μ A, mA, pW, nW

Level display (receiver mode)		
Level display	analog	bargraph display, separately for each detector
	digital	numeric; 0.01 dB resolution
Detectors	max. 4 selectable	max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average
Units of level axis		dBm, dB μ V, dBmV, dB μ A, dBpW, dBpT
RF spectrum		
Logarithmic level axis		10 dB to 200 dB, in steps of 10
Frequency axis		linear or logarithmic
Number of traces		6
Detectors	normal scan	max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average
	time domain scan ⁷	max. peak, min. peak, average, quasi-peak, CISPR-average, RMS-average

Spectrogram display (analyzer mode)		
Result display		color-graded bitmap
Spectrogram bitmap color depth		240 colors
Dynamic range covered by bitmap colors		selectable, up to 200 dB (nom.)
History depth		max. 100 000 frames
Recording mode		single trace, continuous, frame count
Trace detector		max. peak, min. peak, sample, RMS, average
Number of markers		16
Marker readout		frequency, time/frame number, level

⁷ Requires R&S®ESR-K53 option.

Level measurement uncertainty		
Absolute level uncertainty at 64 MHz	RBW = 10 kHz, CW signal, level = -10 dBm, reference level = -10 dBm, RF attenuation = 10 dB	
	+20 °C to +30 °C	
	preselection = off ⁸	< 0.2 dB ($\sigma = 0.07$ dB)
	preselection = on ⁹	< 0.3 dB ($\sigma = 0.1$ dB)
	+5 °C to +40 °C	
	preselection = off ⁸	< 0.35 dB ($\sigma = 0.12$ dB)
	preselection = on ⁹	< 0.45 dB ($\sigma = 0.15$ dB)
Frequency response referenced to 64 MHz	DC coupling, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preselection = off ⁸ , with R&S [®] FSV-B22 option: RF preamplifier = off, +20 °C to +30 °C	
	9 kHz ≤ f < 10 MHz	< 0.5 dB ($\sigma = 0.17$ dB)
	10 MHz ≤ f < 3.6 GHz	< 0.3 dB ($\sigma = 0.1$ dB)
	3.6 GHz ≤ f ≤ 7 GHz	< 0.5 dB ($\sigma = 0.17$ dB)
	7 GHz ≤ f < 13.6 GHz, span < 1 GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	13.6 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz	< 2 dB ($\sigma = 0.67$ dB)
	DC coupling, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preselection = on ⁹ , preamplifier = on/off, +20 °C to +30 °C	
	9 kHz ≤ f < 3.6 GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	3.6 GHz ≤ f ≤ 7 GHz	< 0.8 dB ($\sigma = 0.27$ dB)
	7 GHz ≤ f < 13.6 GHz, span < 1 GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	13.6 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz	< 2 dB ($\sigma = 0.67$ dB)
	any setting for RF attenuation and preselection, preamplifier = off, +5 °C to +40 °C	
	9 kHz ≤ f < 3.6 GHz	< 1 dB ($\sigma = 0.33$ dB)
	3.6 GHz ≤ f ≤ 7 GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	7 GHz ≤ f < 13.6 GHz	< 2.5 dB ($\sigma = 0.83$ dB)
	13.6 GHz ≤ f ≤ 26.5 GHz	< 3 dB ($\sigma = 1$ dB)
	any setting for RF attenuation and preselection, preamplifier = on, +5 °C to +40 °C	
	9 kHz ≤ f < 3.6 GHz	< 1 dB ($\sigma = 0.33$ dB)
	3.6 GHz ≤ f ≤ 7 GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	7 GHz ≤ f < 13.6 GHz	< 3 dB ($\sigma = 1$ dB)
13.6 GHz ≤ f ≤ 26.5 GHz	< 3.5 dB ($\sigma = 1.17$ dB)	
with R&S [®] ESR-B29 option, DC coupling, preamplifier = off, +5 °C to +40 °C		
10 Hz ≤ f < 9 kHz	< 1 dB ($\sigma = 0.33$ dB)	
Attenuator switching uncertainty	f = 64 MHz, 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.2 dB ($\sigma = 0.07$ dB)
Uncertainty of reference level setting		0 dB ¹⁰ (nom.)
Bandwidth switching uncertainty	referenced to RBW = 10 kHz	
	sweep filters	< 0.1 dB ($\sigma = 0.03$ dB)
	FFT filters	< 0.2 dB ($\sigma = 0.07$ dB)
Quasi-peak display		in line with CISPR 16-1-1

Nonlinearity of displayed level		
Logarithmic level display	S/N > 16 dB	
	0 dB to -50 dB	< 0.1 dB ($\sigma = 0.03$ dB)
	-50 dB to -60 dB	< 0.15 dB ($\sigma = 0.05$ dB)
	-60 dB to -70 dB	< 0.2 dB ($\sigma = 0.07$ dB)
Linear level display	S/N > 16 dB, 0 dB to -70 dB	< 5 % of reference level (nom.)

⁸ Preselection = off is only available in analyzer mode. In receiver mode the preselection is permanently on.

⁹ Default setting in receiver mode.

¹⁰ The setting of the reference level affects only the graphical representation of the measurement result on the display, not the measurement itself. Therefore, the reference level setting causes no additional uncertainty in measurement results.

Total measurement uncertainty	
	CW signal, level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, sweep type = sweep, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preselection = off ⁸ , with R&S®FSV-B22 option: RF preamplifier = off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C
9 kHz ≤ f < 10 MHz	0.39 dB
10 MHz ≤ f < 3.6 GHz	0.29 dB
3.6 GHz ≤ f ≤ 7 GHz	0.39 dB
7 GHz ≤ f < 13.6 GHz	1 dB
13.6 GHz ≤ f ≤ 26.5 GHz	1.33 dB
	CW signal, level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, sweep type = sweep, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preselection = on ⁹ , preamplifier = off /on, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C
9 kHz ≤ f < 3.6 GHz	0.47 dB
3.6 GHz ≤ f ≤ 7 GHz	0.59 dB
7 GHz ≤ f < 13.6 GHz	1.01 dB
13.6 GHz ≤ f ≤ 26.5 GHz	1.34 dB

Measurement speed

Receiver mode		
Time domain scan ¹¹	CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 100 ms, peak detector	120 ms (meas.)
	CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 1 s, quasi-peak detector	2 s (meas.)
	CISPR band C/D, 30 MHz to 1000 MHz, RBW = 120 kHz, measurement time = 10 ms, peak detector	750 ms (meas.)
	CISPR band C/D, 30 MHz to 1000 MHz, RBW = 9 kHz, measurement time = 10 ms, peak detector	1.2 s (meas.)
	CISPR band C/D, 30 MHz to 1000 MHz, RBW = 120 kHz, measurement time = 1 s, quasi-peak detector	80 s (meas.)
Analyzer mode		
Local measurement and display update rate		1.1 ms (900/s) (meas.)
Remote measurement, 1000 sweep averages ¹²		1 ms (1000/s) (meas.)
Remote measurement and LAN transfer ¹²		3 ms (333/s) (meas.)
Marker peak search		1.5 ms (meas.)
Center frequency tune and transfer ¹²		15 ms (meas.)

Trigger functions

Trigger		
Trigger source	analyzer mode	free run, video, external, IF power
	receiver mode	free run, video, external
Trigger offset	analyzer mode, span \geq 10 Hz	31.25 ns to 30 s, min. resolution = 31.25 ns (or 1 % of offset)
	analyzer mode, span = 0 Hz	(–sweep time) to 30 s, min. resolution = 31.25 ns (or 1 % of offset)
Max. deviation of trigger offset	analyzer mode	$\pm(7.8125 \text{ ns} + (0.1 \% \times \text{trigger offset}))$
IF power trigger (analyzer mode)		
Sensitivity	min. signal power	–60 dBm + RF attenuation – RF pre-amplifier gain (nom.)
	max. signal power	–10 dBm + RF attenuation – RF pre-amplifier gain (nom.)
IF power trigger bandwidth	RBW > 500 kHz, swept	40 MHz (nom.)
	RBW > 20 kHz, FFT	
	RBW \leq 500 kHz, swept	6 MHz (nom.)
	RBW \leq 20 kHz, FFT	
Gated sweep (analyzer mode)		
Gate source		video, external, IF power
Gate delay		31.25 ns to 30 s, min. resolution = 31.25 ns (or 1 % of delay)
Gate length		31.25 ns to 30 s, min. resolution = 31.25 ns (or 1 % of gate length)
Max. deviation of gate length		$\pm(7.8125 \text{ ns} + (0.1 \% \times \text{gate length}))$

¹¹ Requires R&S®ESR-K53 option.

¹² Measured with personal computer equipped with Intel Core2 Duo 2.13 GHz and Gbit LAN interface.

Audio demodulation

AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

Inputs and outputs

RF input		
Impedance		50 Ω
Connector	R&S®ESR3, R&S®ESR7	N female
	R&S®ESR26	test port adapter APC 3.5 mm/N female
VSWR	RF attenuation \geq 10 dB, DC coupled	
	10 Hz \leq f \leq 1 GHz	< 1.2
	1 GHz < f < 3.6 GHz	< 1.5, 1.3 (typ.)
	3.6 GHz \leq f < 20 GHz	< 2, 1.8 (typ.)
	20 GHz \leq f \leq 26.5 GHz	< 2.2, 2 (typ.)
	RF attenuation < 10 dB, DC coupled	
	10 Hz \leq f \leq 1 GHz	< 2
	1 GHz < f \leq 26.5 GHz	< 3
	RF attenuation \geq 10 dB, AC coupled	
	10 MHz \leq f \leq 1 GHz	< 1.2
	1 GHz < f < 3.6 GHz	< 1.5, 1.3 (typ.)
	3.6 GHz \leq f < 20 GHz	< 2, 1.8 (typ.)
20 GHz \leq f \leq 26.5 GHz	< 2.2, 2 (typ.)	
Setting range of attenuator	RF input 1	0 dB to 75 dB, in 5 dB steps
	RF input 2	10 dB to 75 dB, in 5 dB steps

Probe power supply		
Supply voltages	3-pin connector	+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.)
	5-pin connector	\pm 10 V DC and ground, max. 100 mA, (nom.)

Noise source drive		
Connector		BNC female
Output voltage		0 V/28 V, max. 100 mA, switchable (nom.)

AF output		
Connector		3.5 mm mini jack
Output impedance		10 Ω (nom.)
Open-circuit voltage		up to 1.5 V, adjustable

USB interface	front panel	2 ports, type A plug, version 2.0
	rear panel	2 ports, type A plug, version 2.0

Reference output		
Connector		BNC female
Impedance		50 Ω (nom.)
Output frequency	internal reference	10 MHz
	external reference	same as reference input signal
Level		> 0 dBm (nom.)

Reference input		
Connector		BNC female
Impedance		50 Ω (nom.)
Input frequency range		1 MHz \leq f _m \leq 20 MHz, in 100 kHz steps
Required level		> 0 dBm into 50 Ω (nom.)

External trigger/gate input		
Connector		BNC female
Trigger voltage		0.5 V to 3.5 V (nom.)
Input impedance		10 k Ω (nom.)

IEC/IEEE bus control		
		interface in line with IEC 625-2 (IEEE 488.2)
Command set		SCPI 1997.0
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

LAN interface		
		10/100/1000BASE-T
Connector		RJ-45

External monitor		
Connector		VGA-compatible, 15-pin mini D-Sub

User port		
Connector		9-pin D-Sub male
Output		TTL-compatible, 0 V/5 V (nom.), max. 15 mA (nom.)
Input		TTL-compatible, max. 5 V (nom.)

IF/video out (analyzer mode)		
Connector		BNC female, 50 Ω (nom.)
IF out		
Bandwidth		RBW setting
IF frequency		32 MHz (nom.)
Output level (gain versus RF input)	RF attenuation = 0 dB, RF preamplifier = off, span = 0 Hz	0 dB (nom.)
Video out		
Bandwidth		VBW setting
Output scaling	log. display scale	logarithmic
	lin. display scale	linear
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	1 V, open circuit (nom.)

Trigger out		
Connector		BNC female
Output		TTL-compatible, 0 V/5 V (nom.)

General data

Display		21 cm LC TFT color display (8.4")
Resolution		800 × 600 pixel (SVGA resolution)
Pixel failure rate		$< 1 \times 10^{-5}$

Data storage		
Internal	standard	hard disk \geq 40 Gbyte
	with R&S®ESR-B18 option	solid state disk \geq 8 Gbyte
External		supports USB 2.0 compatible memory devices

Temperature		
Temperature	operating temperature range	+5 °C to +40 °C
	permissible temperature range	0 °C to +50 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading		+40 °C at 90 % rel. humidity, in line with EN 60068-2-30

Mechanical resistance		
Vibration	sinusoidal	5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; in line with EN 60068-2-6
	random	10 Hz to 130 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-T-28800F, class 3, MIL-STD-810E, method 516.4, procedure I

EMC		in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1 ^{13, 14} IEC/EN 61326-2-1 CISPR 11/EN 55011 ¹³ IEC/EN 61000-3-2 IEC/EN 61000-3-3
------------	--	--

Recommended calibration interval		1 year
---	--	--------

Power supply		
AC input voltage range		100 V to 240 V, ± 10 % (nom.)
AC supply frequency		50 Hz to 400 Hz, $+10$ %/ -6 % (nom.)
Max. input current		5.2 A (100 V) to 2.2 A (240 V) (nom.)
Power consumption	R&S®ESR3, R&S®ESR7	150 W, max. 250 W with all options (meas.)
	R&S®ESR26	175 W, max. 250 W with all options (meas.)
Safety		in line with IEC 61010-1, EN 61010-1, CAN/CSA-C22.2 No. 61010-1, UL 61010-1
Test mark		VDE-GS, cCSA _{US}

Weight and dimensions		
Dimensions	W × H × D	412 mm × 197 mm × 517 mm (16.22 in × 7.76 in × 20.35 in)
Net weight without options	R&S®ESR3, R&S®ESR7	12.8 kg (28.22 lb)
	R&S®ESR26	14.6 kg (32.19 lb)

¹³ Emission limits for class B equipment.

¹⁴ Immunity test requirement for industrial environment (EN 61326 table 2).

Options

R&S®FSV-B9 tracking generator (spectrum analyzer mode)

Frequency		
Frequency range	R&S®ESR3	9 kHz to 3.6 GHz
	R&S®ESR7, R&S®ESR26	9 kHz to 7 GHz

Frequency offset		
Setting range		±1 GHz
Setting resolution		1 Hz

Spectral purity		
SSB phase noise	frequency = 1000 MHz, carrier offset = 100 kHz	-90 dBc (1 Hz) (typ.)

Level		
Setting range	normal mode, $9 \text{ kHz} \leq f < 100 \text{ kHz}$	-60 dBm to -10 dBm, in 0.1 dB steps
	normal mode, $f \geq 100 \text{ kHz}$	-60 dBm to 0 dBm, in 0.1 dB steps
	with AM, I/Q, $9 \text{ kHz} \leq f < 100 \text{ kHz}$	-60 dBm to -20 dBm, in 0.1 dB steps
	with AM, I/Q, $f \geq 100 \text{ kHz}$	-60 dBm to -10 dBm, in 0.1 dB steps
Max. deviation of output level	frequency = 64 MHz, +20 °C to +30 °C, output level = -10 dBm, frequency offset = 0 Hz, modulation = off	< 1 dB
Frequency response	output level = -10 dBm, referenced to level at 64 MHz, frequency offset = 0 Hz, modulation = off	
	$9 \text{ kHz} \leq f < 100 \text{ kHz}$	< 4 dB
	$100 \text{ kHz} \leq f \leq 7 \text{ GHz}$	< 3 dB

Dynamic range		
	RBW = 1 kHz, $f > 10 \text{ MHz}$	110 dB

Harmonics, non-harmonic spurious		
	output level = -10 dBm	-30 dBc

Modulation		
Modulation format	external	I/Q, AM, FM
AM	$f > 10 \text{ MHz}$	
Modulation depth		0 % to 100 %
Modulation frequency range		0 Hz to 1 MHz
FM	$f > 10 \text{ MHz}$	
Frequency deviation		0 Hz to 10 MHz
Modulation frequency range		0 Hz to 10 kHz

RF output		
Connector		N female, 50 Ω
VSWR		1.3, (nom.)

TG I/AM IN		
Connector		BNC female, 50 Ω
Input voltage		1 V (V_{pp})

TG Q/FM IN		
Connector		BNC female, 50 Ω
Input voltage		1 V (V_{pp})

R&S®ESR-B10 external generator control

Interface		
IEC/IEEE bus control		24-pin Amphenol female
Aux control		9-pin D-Sub female
Supported signal generators		
		R&S®SGS100A, R&S®SMA100A, R&S®SMB100A, R&S®SMBV100A, R&S®SMC100A, R&S®SME, R&S®SMF100A, R&S®SMG, R&S®SMGL, R&S®SMGU, R&S®SMH, R&S®SMHU, R&S®SMIQ, R&S®SMJ100A, R&S®SML, R&S®SMP, R&S®SMR, R&S®SMT, R&S®SMU200A, R&S®SMV03, R&S®SMX, R&S®SMY

R&S®FSV-B30 DC power supply for 12 V/24 V supply voltage

Input voltage range		10 V to 28 V
Output voltage		120 V to 360 V DC
Input current	$V_{in} = 12 \text{ V}$, instrument without options, preset settings	
	R&S®ESR3, R&S®ESR7	11 A (typ.)
	R&S®ESR26	14 A (typ.)
Temperature	operating temperature range	0 °C to +50 °C
	storage temperature range	-40 °C to +70 °C
Dimensions	W x H x D	201 mm x 125 mm x 56 mm (7.91 in x 4.92 in x 2.20 in)
Net weight		1 kg (2.2 lb)

R&S®FSV-B32 Lithium-ion battery pack

Battery pack		
Output voltage		12 V (nom.)
Operating time	instrument without options, preset settings	
	R&S®ESR3, R&S®ESR7	2 h (nom.)
	R&S®ESR26	1.5 h (nom.)
Charge time	with R&S®FSV-B34 charger, T = +25 °C	3.5 h (nom.)
Temperature	operating temperature range, discharge	0 °C to +50 °C
	operating temperature range, charge	0 °C to +45 °C
	storage temperature range	-20 °C to +60 °C ¹⁵
Dimensions	W x H x D	406 mm x 71 mm x 241 mm (16 in x 2.76 in x 9.49 in)
Net weight		3.4 kg (7.5 lb)

R&S®FSV-B34 charger for R&S®FSV-B32 Lithium-ion battery pack

AC input voltage range		100 V to 240 V, ±10 % (nom.)
AC supply frequency		50 Hz to 60 Hz (nom.)
Power consumption		max. 300 W (nom.)
Dimensions	W x H x D	400 mm x 127 mm x 203 mm (15.75 in x 5 in x 8 in)
Net weight		3.1 kg (6.9 lb)

¹⁵ The battery packs should be stored in an environment with low humidity, free from corrosive gas at a recommended temperature range < +21 °C. Extended exposure to temperatures above +45 °C could degrade battery performance and life.

R&S®ESR-K55 real-time spectrum analyzer mode

The specifications are based on the specifications of the spectrum analyzer mode.

Therefore, these specifications also apply for the real-time spectrum analyzer mode unless otherwise stated.

Span		
Range	f ≤ 7 GHz, preselection = off	10 kHz to 40 MHz
	f > 7 GHz, overview mode = off	10 kHz to 10 MHz
	f > 7 GHz, overview mode = on	10 kHz to 30 MHz
Resolution		1 Hz

Frequency readout		
Number of sweep (trace) points		801
Marker resolution		0.01 Hz
Uncertainty		±(marker frequency × reference uncertainty + 10 % × resolution bandwidth + ½ (span/(sweep points – 1)) + 1 Hz)
Marker tuning frequency step size		span/800

Sweep time		
Range	real-time spectrum, real-time spectrogram, free run or stop on trigger	52 µs to 1 s ¹⁶
	auto rearm trigger	5.2 µs to 1 s
		5.2 µs
Resolution		5.2 µs

Data acquisition		
A/D converter		
Sampling rate		128 Msample/s
Resolution		16 bit
FFT length		1024/2048/4096/8192/16 384
FFT window		Gaussian
FFT overlap factor		≥ 80 %
Spectrum (FFT) processing rate	span = 40 MHz	250 000/s
Minimum detectable signal duration	span = 40 MHz, SNR > 60 dB	25 ns (nom.)

Resolution bandwidths		
Range	RBW 6 dB = off	2 Hz to 128 kHz, fixed span/RBW ratio
	RBW 6 dB = on	3 Hz to 192 kHz, fixed span/RBW ratio
Span/RBW ratio	RBW 6 dB = off	312/625/1250/2500/5000
	RBW 6 dB = on	208/416/833/1666/3333
Bandwidth uncertainty		< 3 % (nom.)

Video bandwidths		none
-------------------------	--	------

Channel bandwidths		none
---------------------------	--	------

¹⁶ Time period during which individual FFTs contribute to the results of the selected trace detector.

Level

Amplitude flatness	(1.25 × signal analysis bandwidth) ≤ f_{center} ≤ 7 GHz	±0.8 dB (nom.)
	$f > 7$ GHz, span ≤ 10 MHz	±1 dB (nom.)

Spurious-free dynamic range	span = 40 MHz	< -70 dBc (nom.)
------------------------------------	---------------	------------------

Minimum signal duration necessary for specified level measurement uncertainty ¹⁷	RBW 6 dB = off, span/RBW ratio = 312, trace detector = max. peak, span =	
	40 MHz	24 μs (nom.)
	20 MHz	45 μs (nom.)
	10 MHz	86 μs (nom.)
	5 MHz	168 μs (nom.)
	2 MHz	414 μs (nom.)
	1 MHz	824 μs (nom.)
	500 kHz	1.7 ms (nom.)
	200 kHz	4.1 ms (nom.)
	100 kHz	8.2 ms (nom.)
	50 kHz	16.4 ms (nom.)
	20 kHz	41 ms (nom.)
10 kHz	82 ms (nom.)	

Result display

Display modes		full screen, split screen
Max. number of screens	display mode = split screen	4
Result display types	with or without active frequency mask trigger, or any combination if display mode = split screen	real-time spectrum, persistence spectrum, real-time spectrogram

Real-time spectrum		
Number of traces		4
Trace detector		max. peak, min. peak, average
Trace functions		clear/write, max. hold, min. hold, view
Number of markers		16
Marker readout		frequency, level
Maximum sweep update rate ¹⁸		10 000/s

Persistence spectrum		
Persistence bitmap resolution		801 × 600 points
Persistence bitmap color depth		256 colors
Probability range covered by bitmap colors		selectable, 0 % to 100 %
Persistence duration		0 s to 8 s
Number of markers		16
Marker readout		frequency, level, hit probability
Number of real-time traces	in addition to persistence spectrum display	1
Real-time trace detector		max. peak, min. peak, sample, average
Real-time trace functions		clear/write, max. hold, min. hold, view

¹⁷ Events lasting shorter than the minimum event duration specification will result in degraded level accuracy.

¹⁸ Sweep update rate includes FFT overlap and trace detector processing.

Spectrogram		
Result display		color-graded bitmap
Spectrogram bitmap color depth		240 colors
Dynamic range covered by bitmap colors		selectable, up to 200 dB (nom.)
History depth		max. 100 000 frames ¹⁹
Recording mode		single trace, continuous, frame count
Trace detector		max. peak, min. peak, sample
Number of markers		16
Marker readout		frequency, time/frame number, level
Maximum sweep update rate ²⁰		10 000/s

Trigger

Trigger source		free run, frequency mask, external
-----------------------	--	------------------------------------

Frequency mask trigger		
Trigger level resolution		0.5 dB
Minimum required mask distance to noise floor		30 dB (nom.)
Dynamic range	frequency mask – reference level	0 dB to –80 dB (nom.)
Trigger level accuracy	frequency mask > reference level – 50 dB	±(frequency response + 1.0 dB) (nom.)
	frequency mask > reference level – 70 dB	±(frequency response + 2.5 dB) (nom.)
Trigger uncertainty	span = 40 MHz	±12 µs (nom.)
Trigger conditions		enter mask area, leave mask area
Trigger modes		auto rearm trigger, stop on trigger
Trigger mask		
Mask length		3 to 801 frequency points
Mask frequency resolution		span/800
Mask shape generation		manual, auto set (mask derived from the measured spectrum)
Minimum signal duration for 100 % probability of trigger (nominal values) ²¹		see minimum signal duration required for specified level measurement uncertainty

Trigger out		
Connector		BNC female
Output		TTL-compatible, 0 V/5 V (nom.)

¹⁹ A frame is the measurement result displayed in one row of the spectrogram. It may consist of one or more traces, depending on the set sweep count. For example, a sweep count of 2 means that two traces will be combined to one row in the spectrogram using the set trace detector.

²⁰ Sweep update rate includes FFT overlap and trace detector processing.

²¹ Events lasting shorter than the minimum event duration specification will result in degraded frequency mask trigger accuracy.

R&S® ESR-K56 IF analysis

Level display (receiver mode)		
IF spectrum		
Span		max. 10 MHz
Resolution bandwidths		10 Hz to 100 kHz in 1/2/3/5 sequence
Detector		sample
Logarithmic level axis		10 dB to 200 dB in steps of 10 dB
Frequency axis		linear
Number of traces		3

Ordering information

Designation	Type	Order No.
EMI Test Receiver	R&S®ESR3	1316.3003.03
EMI Test Receiver	R&S®ESR7	1316.3003.07
EMI Test Receiver	R&S®ESR26	1316.3003.26
Accessories supplied		
Power cable, probe power cable and quick start guide		
R&S®ESR26: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connectors		

Options

Designation	Type	Order No.	Retrofittable	Remarks
Impact Protection	R&S®ESR-B1	1316.4100.02	yes	user-retrofittable
OCXO Reference Frequency	R&S®FSV-B4	1310.9522.02	yes	user-retrofittable
OCXO Extended Frequency Stability	R&S®FSV-B4	1310.9522.03	yes	user-retrofittable
Tracking Generator (9 kHz to 7 GHz)	R&S®FSV-B9	1310.9545.02	yes	retrofit in service center
External Generator Control	R&S®ESR-B10	1310.9551.03	yes	retrofit in service center
Solid State Drive (SSD, removable hard drive) ²²	R&S®ESR-B18	1316.3555.18	yes	user-retrofittable
Spare Hard Drive (removable hard drive) ²²	R&S®ESR-B19	1316.3561.18	yes	user-retrofittable
RF Preamplifier (100 kHz to 7 GHz)	R&S®FSV-B22	1310.9600.02	yes	user-retrofittable, for R&S®ESR3 and R&S®ESR7 only
Frequency Extension 10 Hz and MIL bandwidths	R&S®ESR-B29	1316.3578.02	yes	user-retrofittable
DC Power Supply for 12 V/24 V supply voltage	R&S®FSV-B30	1329.0243.02	yes	user-retrofittable
Lithium-Ion Battery Pack	R&S®FSV-B32	1321.3750.04	yes	user-retrofittable, requires R&S®FSV-B30 and R&S®FSV-B34
Lithium-Ion Battery Charger	R&S®FSV-B34	1321.3950.02		
Hardware for Time Domain and Real-Time Analysis	R&S®ESR-B50	1316.3584.02	yes	retrofit in service center
Firmware/software				
Time Domain Scan	R&S®ESR-K53	1316.3590.02		requires R&S®ESR-B50
Real-Time Analysis	R&S®ESR-K55	1316.3603.02		requires R&S®ESR-B50
IF Analysis	R&S®ESR-K56	1316.3610.02		

Upgrades

Designation	Type	Order No.	Retrofittable	Remarks
Windows 10 Upgrade for R&S®ESR with FMR11 CPU board with hard drive ²³	R&S®ESR-U2	1338.2300.10	yes	contact service center
Windows 10 Upgrade for R&S®ESR with FMR11 CPU board with solid state drive ²³	R&S®ESR-U2	1338.2300.11	yes	contact service center

²² For instruments delivered with Windows 10 ex factory or instruments with upgrade R&S®ESR-U2 only. For other models and spare parts contact your local Rohde & Schwarz service center.

²³ For R&S®ESR with the following serial numbers: R&S®ESR3: > 101830, R&S®ESR7: > 101393, R&S®ESR26: > 101295. For instruments with lower serial numbers contact your local Rohde & Schwarz service center.

Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IEEE Bus Cable, length: 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, length: 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter	R&S®ZZA-478	1096.3248.00
Matching pads, 50/75 Ω		
Matching Pad, 50/75 Ω, L Section, matching at both ends	R&S®RAM	0358.5414.02
Matching Pad, 50/75 Ω, series resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
SWR bridges, 50 Ω		
SWR Bridge, 50 Ω, 5 MHz to 3 GHz	R&S®ZRB2	0373.9017.5X
SWR Bridge, 50 Ω, 40 kHz to 4 GHz	R&S®ZRC	1039.9492.5X
High-power attenuators		
High-Power Attenuator, 100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
High-Power Attenuator, 50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
High-Power Attenuator, 50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
Connectors and cables		
Probe Power Connector, 3-pin		1065.9480.00
DC block		
DC Block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.02
For R&S®ESR26 only		
Test Port Adapter, N male		1021.0541.00
Test Port Adapter, 3.5 mm male		1021.0529.00

Service options		
Extended Warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended Warranty, two years	R&S®WE2	
Extended Warranty with Calibration Coverage, one year	R&S®CW1	
Extended Warranty with Calibration Coverage, two years	R&S®CW2	

Extended warranty with a term of one to two years (WE1 to WE2)

Repairs carried out during the contract term are free of charge ²⁴. Necessary calibration and adjustments carried out during repairs are also covered. Simply contact the forwarding agent we name; your product will be picked up free of charge and returned to you in top condition a couple of days later.

Extended warranty with calibration (CW1 to CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs ²⁴ and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

For product brochure, see PD 3606.7201.12 and www.rohde-schwarz.com

²⁴ Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Rohde & Schwarz training

www.training.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- | North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- | China | +86 800 810 82 28 | +86 400 650 58 96
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 3606.7201.22 | Version 06.00 | May 2017 (as)

R&S®ESR EMI Test Receiver

Data without tolerance limits is not binding | Subject to change

© 2012 - 2017 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



3606720122